

## Complete illuminated knob-operated 3-position selector switch P3L



### Technical data

Rated insulation voltage $U_i$	500 V
Rated continuous current $I_N=I_{th}$	10 A
Rated operational current $I_e$ for AC-15	2.5 A (230 V) 1.6 A (400/500 V)
Rated operational current $I_e$ for AC-13	4 A (24 V) 1 A (110 V) 0.25 A (220 V)
Switch short-circuit protection	10 A (fast fuse link) 1 kA (prospective short circuit current for $U_e=500$ V)
Mechanical endurance	0.3 mln (transposition cycles)
Electrical endurance	0.2 mln (at rated switching voltages and currents) 1.0 mln (switching cycles) - up to 80 VA (for AC electromagnets) - up to 10 W (for DC electromagnets)
Frequency of switching	up to 360 h <sup>-1</sup>
Ambient temperature	-40 ... +70°C (work) -40 ... +70°C (storage)
Vibration test (acc. to IEC 60068-2-6)	2...13, 2...100 Hz (frequency) ± 1 mm (amplitude) ±0.7 g (acceleration)
Shock test (acc. to IEC 60068-2-27)	15 g (peak acceleration) 11 ms (impulse duration)
Damp heat cyclic test (acc. to IEC 60068-2-30)	55°C (ambient temperature) 95% (relative humidity)
Salt mist cyclic test (acc. to IEC 60068-2-52)	severity 1
Protection level (Publ. IEC529) of pushbutton actuators after mounting in panel opening	IP65
Wire gauge	2× 1...2.5 mm <sup>2</sup> (solid) 0.75...1.5 mm <sup>2</sup> (stranded)
Working position	any
Terminal marking	PN-EN 50013
Lamp power rating	1 W (LED 24/230 V) 2 W (bulb 24/230 V) 1.6 W (LED UNI 24-230 V AC and 24-110 V DC)
Lamp rated voltage 24,230 V AC and 24, 220 V DC	24 ... 230 V
Compliance with the standard	PN-EN 60947-5-1 IEC 60947-5-1 IEC 60947-1

### Accessories

Legend plate ST22-1901 for knob or key-operated selector switches

### Ordering code

SP22-  .  -  -

#### Light sources

24-BA9S  
230-BA9S  
24-LED AC/DC  
220-LED-DC  
230-LED-AC  
LED-UNI

#### Switches

10, 20, 30, 40  
01, 02, 03, 04  
11, 12, 13  
21, 22  
31

#### Colour

C ● red  
G ● yellow  
Z ● green  
N ● blue  
B ○ white

#### Pushbutton type

P3L maintained  
P3CCL self-return from right  
P3CCL self-return from right and left

Description: the first digit represents the number of normally open circuits, the second digit represents the number of normally closed circuits.

### Components

#### Pushbutton actuators

Illuminated knob-operated 3-position selector switch actuator P3L

#### Lighting elements

Lamp holders for light sources SP22

Light sources SP22

#### Holders


Holder SP22-6625

#### Switches

Switches SP22 rail-mounted

Standard switches SP22

### Diagrams

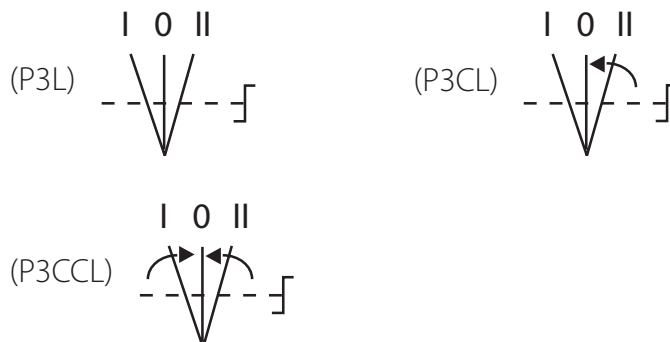

## Dimensions

