

VARISTOR SURGE PROTECTIVE DEVICE – SPMO20C






SPMO20C\4P

SPMO20C\1P



















	,
TECHNICAL SPECIFICATIONS:	
Surge Protective Device	Type 2, Class II
Network type	TN-S/TN-C
Rated voltage AC Un	230/400V
The highest continuous operating voltage AC $\ensuremath{\text{U}_c}$	275V
Voltage protection level U _p	≤ 1.3kV
Nominal discharge current I _n (8/20μs)	20 kA
Maximum discharge current I _{max} (8/20μs)	40 kA
Leakage current IPE	< 0.5mA
Short-circuit current I _{SCCR}	20kA
Maximum additional fuse	125 gL/gG
Frequency	50/60Hz
Insulation resistance R _{ISOL}	> 10 ³ MΩ
Insert status	(green - OK, red - no protection)
Terminal tightening torque	2.0Nm
Cross-section of connection cables	
solid / flexible	6.0 35mm² / 4.0 25mm²
Remote fault signaling	Yes
Operating temperature	-40° to + 80°
Permissible humidity R _h	≤ 95%
Mounting method	TH35 rail
Base material	PA6, UL94-V0 Flammability Test
Insert material	PA6, UL94-V0 Flammability Test
Degree of protection	IP20
Installation site	Indoor use only











Compliance with the standard IEC/EN 61643-11




















VARISTOR SURGE PROTECTIVE DEVICE – SPMO20C

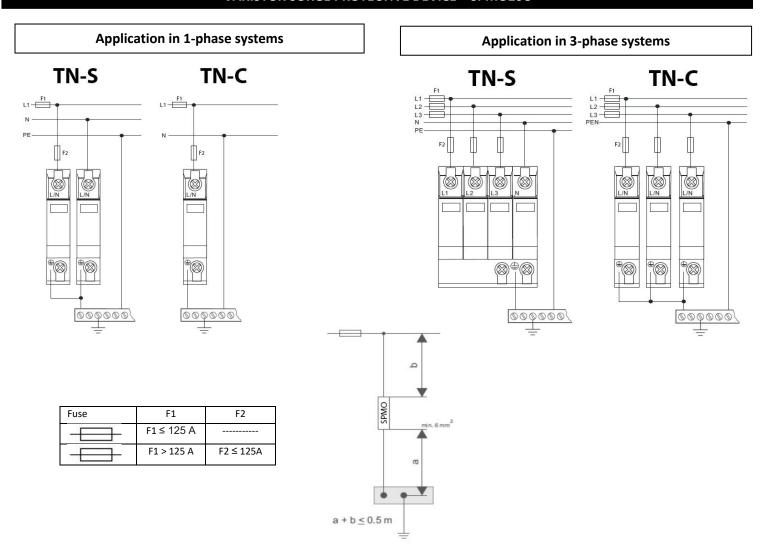

Surge protective devices of SPMO series by Spamel are used in electrical switchboards in apartments, houses and small utility buildings. The surge protective devices are used to protect electrical installations against overvoltages caused by lightning discharges and prevent the penetration of surge currents into the power line.

Safety and assembly requirements.

Operation of the device should be carried out in accordance with the requirements set out in the regulations for the installation of electrical equipment and other technical standards for the operation, regulation and repair of electrical equipment. Installation, connection and commissioning should be performed only by qualified electrical and technical personnel who have been trained in safety, in accordance with the principles set out in the specification and technical documentation.

Importer: S.I. Spamel, Polska, 56-416 Twardogóra, ul. Wojska Polskiego 3.

Made in the PRC.



