

Cam switch in enclosure ŁK32R OB4



Ordering code

ŁK 32 R- \

Mounting


- OB4** in housing OB4
- OB4C** in housing OB4 with yellow-red front
- OB4Z** in housing OB4 with lockable front
- OB4ZC** in housing OB4 with lockable yellow-red front

Assembly number

- 1.825** Disconnecter 0-1 (1 - pole)
- 1.828** Disconnecter 0-1 (2 - pole)
- 2.8211** Disconnecter 0-1 (3 - pole)
- 2.8210** Disconnecter 0-1 (4 - pole)
- 3.8220** Disconnecter 0-1 (5 - pole)
- 3.8210** Disconnecter 0-1 (6 - pole)
- 4.8240** Disconnecter 0-1 (7 - pole)
- 4.824** Disconnecter 0-1 (8 - pole)
- 3.8368** Reversing switch L-0-P
- 3.83139** 2-speed switch
2 separate windings
- 4.8390** 2-speed Dahlander switch
- 4.831** 3-phase starting switch 0-Y-Δ
- 4.883** Voltmeter selector switch
- 2.4414** Rotary disconnecter 0-1
- 2.8445** Control switch 0-1-2-3
- 1.834** Disconnecter 1-0-2 (1 - pole)
- 2.8338** Disconnecter 1-0-2 (2 - pole)
- 3.8380** Disconnecter 1-0-2 (3 - pole)
- 4.8396** Disconnecter 1-0-2 (4 - pole)

32 Current
32 A

Dimensions

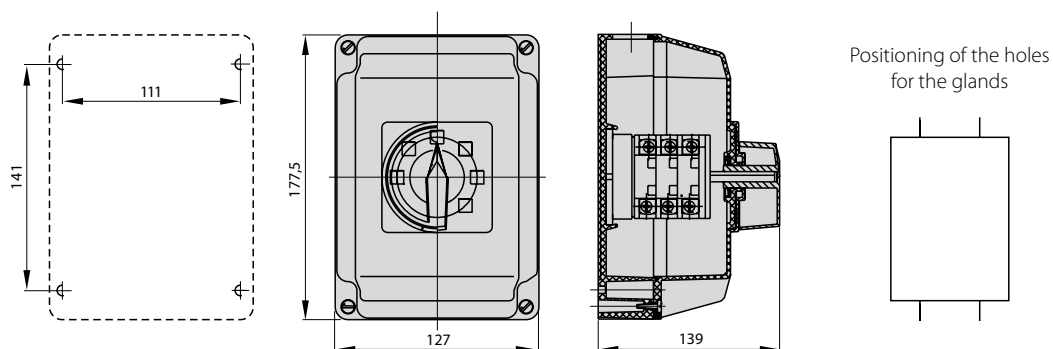

Number of segments in the switch

1 ... 4

Gland type

M25×1,5

Note!

For assembly ŁK32R-4.831 and ŁK32R-3.8368
3 glands M25×1,5 are used

Technical data (continuous work)

Rated insulation voltage U_i	690 V
Rated withstand impulse voltage U_{imp}	6 kV
Rated continuous current $I_u=I_{th}$	32 A
Rated operational power P_e for AC-3	9 kW (230 V)
	17 kW (400 V)
	-
Rated operational power P_e for AC-4	18 kW (690 V)
	7.5 kW (230 V)
	10 kW (400 V)
Rated operational current I_e for AC-3	-
	7.5 kW (690 V)
	32 A (230 V)
Rated operational current I_e for AC-4	28 A (400 V)
	-
	16 A (690 V)
Rated operational current I_e for AC-4	25 A (230 V)
	20 A (400 V)
	-
Short-time short-circuit withstand current $I_{cw}(1s)$	8 A (690 V)
	1 kA
	1.4 kA
Rated short-circuit making current I_{cm}	1.4 kA
Rated conventional short-circuit current	12 kA
Rated current fuse link gG	32 A
Tightening torque, terminals	1.2 Nm
Mechanical endurance	3.0 mln (transposition cycles)
Ambient temperature	-40 ... +70°C (work)
	-40 ... +70°C (storage)
Wire gauge	4...6 mm ²
Protection level: PN-EN 60529 to the panel	IP65
Vibration test (acc. to IEC 60068-2-6)	2...13, 2...100 Hz (frequency)
	± 1 mm (acceleration amplitude)
	±0.7 g (acceleration amplitude)
Shock test (acc. to IEC 60068-2-27)	15 g (peak acceleration)
	11 ms (impulse duration)
Damp heat cyclic test (acc. to IEC 60068-2-30)	55°C (ambient temperature)
	95% (relative humidity)
Salt mist cyclic test (acc. to IEC 60068-2-52)	severity 1