

## Cam switch, base-rail mounted, SK10 BS



### Ordering code

SK 10 -  \

#### Mounting

- BS23** base-rail mounted, front I (IP65), front mounted with 2 screws  
**BS24** base-rail mounted, front I yellow-red (IP65), front mounted with 2 screws  
**BS27** base-rail mounted, front III (IP65), lockable, front mounted with 2 screws  
**BS28** base-rail mounted, front III yellow-red (IP65), lockable, front mounted with 2 screws

#### Assembly number

- 1.825** Disconnecter 0-1 (1 - pole)  
**1.828** Disconnecter 0-1 (2 - pole)  
**2.8211** Disconnecter 0-1 (3 - pole)  
**2.8210** Disconnecter 0-1 (4 - pole)  
**3.8220** Disconnecter 0-1 (5 - pole)  
**3.8210** Disconnecter 0-1 (6 - pole)  
**4.8240** Disconnecter 0-1 (7 - pole)  
**4.824** Disconnecter 0-1 (8 - pole)  
**5.8220** Disconnecter 0-1 (9 - pole)  
**5.822** Disconnecter 0-1 (10 - pole)  
**6.8210** Disconnecter 0-1 (11 - pole)  
**6.821** Disconnecter 0-1 (12 - pole)  
**7.8220** Disconnecter 0-1 (13 - pole)  
**7.822** Disconnecter 0-1 (14 - pole)  
**8.8270** Disconnecter 0-1 (15 - pole)  
**8.827** Disconnecter 0-1 (16 - pole)  
**9.8210** Disconnecter 0-1 (17 - pole)  
**9.821** Disconnecter 0-1 (18 - pole)  
**10.8210** Disconnecter 0-1 (19 - pole)  
**10.821** Disconnecter 0-1 (20 - pole)  
**3.8368** Reversing switch L-0-P  
**3.83139** 2-speed switch  
2 separate windings  
**4.8390** 2-speed Dahlander switch  
**7.8538** 2-speed reversing  
Dahlander switch  
**4.831** 3-phase starting switch 0-Y-Δ  
**5.8538** 3-phase starting  
reversing switch  
**6.4470** 3-speed Dahlander switch  
single winding for low speed  
**6.4480** 3-speed Dahlander switch  
single winding for medium speed  
**6.4490** 3-speed Dahlander switch  
single winding for high speed  
**4.883** Voltmeter selector switch  
**2.4414** Rotary disconnecter 0-1  
**2.8445** Control switch 0-1-2-3  
**1.834** Disconnecter 1-0-2 (1 - pole)  
**2.8338** Disconnecter 1-0-2 (2 - pole)  
**3.8380** Disconnecter 1-0-2 (3 - pole)  
**4.8396** Disconnecter 1-0-2 (4 - pole)  
**5.8380** Disconnecter 1-0-2 (5 - pole)  
**6.8380** Disconnecter 1-0-2 (6 - pole)  
**7.8380** Disconnecter 1-0-2 (7 - pole)  
**8.8380** Disconnecter 1-0-2 (8 - pole)  
**9.8380** Disconnecter 1-0-2 (9 - pole)  
**10.8380** Disconnecter 1-0-2 (10 - pole)

#### Current

10 10 A

### Components

#### Fronts of cam switches

Front I SK10-1406 for assemblies P... and BS...


Front I SK10-1406 for assemblies BS... (mounted directly on the door)

Front III SK10-1410 for assemblies P... and BS...(lockable)

Front III SK10-1410 for assemblies BS... (lockable, mounted directly on the door)


## Dimensions

Snap mounting on TS35 rail

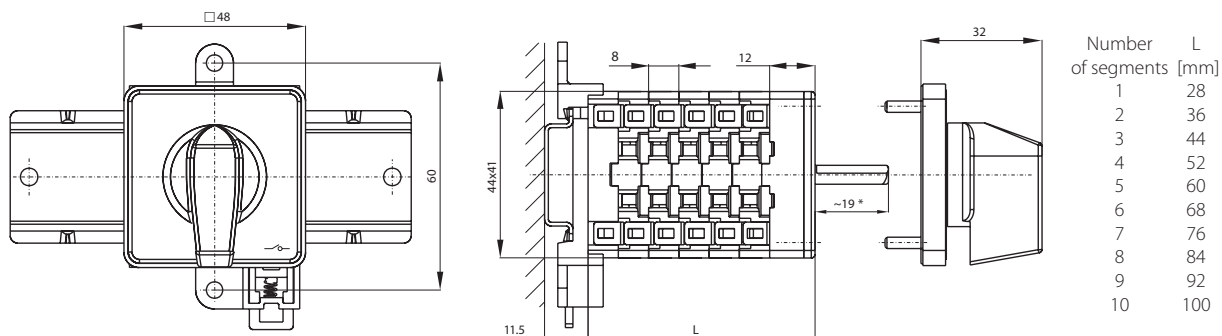

\* It is possible to increase the length by a multiple of 8 [mm]

Base mounting

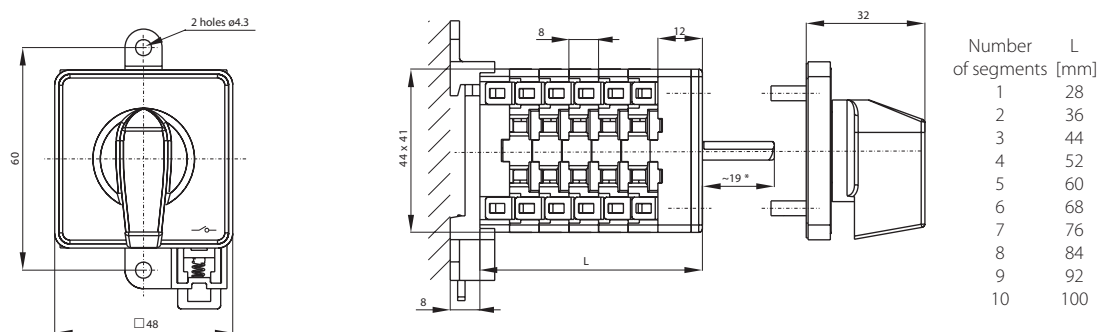

\* It is possible to increase the length by a multiple of 8 [mm]

## Number of segments in the switch

1 ... 10

## Technical data

Rated insulation voltage $U_e$	690 V
Rated withstand impulse voltage $U_{imp}$	6 kV
Rated continuous current $I_u=I_{th}$	16 A
Rated operational current $I_e$ for AC-21A, AC-22A	10 A (230/400/500/690 V)
Rated operational power $P_e$ for AC-23A	2 kW (230 V) 4 kW (400 V) 5 kW (500 V) 6 kW (690 V)
Rated operational power $P_e$ for AC-3	1.5 kW (230 V) 3 kW (400 V) 3.5 kW (500 V) 5 kW (690 V)
Rated operational current $I_e$ for DC-21A	10 A (24 V) 6 A (110 V) 5 A (220 V)
Short-time short-circuit withstand current $I_{cw}(1s)$	0.25 kA
Rated short-circuit making current $I_{cm}$	0.34 kA
Rated conventional short-circuit current	10 kA
Rated current fuse link gG	10 A
Wire gauge	1...4 mm <sup>2</sup>
Tightening torque, terminals	0.5 Nm
Panel mounting	31/□36
Mechanical endurance	3.0 mln (transposition cycles)
Ambient temperature	-40 ... +70°C (work) -40 ... +70°C (storage)
Protection level: PN-EN 60529 to the panel	IP65
Protection level of OB enclosure	IP65
Vibration test (acc. to IEC 60068-2-6)	2...13, 2...100 Hz (frequency) ± 1 mm (acceleration amplitude) ±0.7 g (acceleration amplitude)
Shock test (acc. to IEC 60068-2-27)	15 g (peak acceleration) 11 ms (impulse duration)
Damp heat cyclic test (acc. to IEC 60068-2-30)	55°C (ambient temperature) 95% (relative humidity)
Salt mist cyclic test (acc. to IEC 60068-2-52)	severity 1