


Cam switch, panel-mounted, SK40 P



Ordering code

SK 40 - \

Mounting

- P03 front I (IP65)
- P04 front I yellow-red (IP65)
- P07 front III (IP65), lockable
- P08 front III yellow-red (IP65), lockable

Assembly number

- 1.825 Disconnecter 0-1 (1 - pole)
- 1.828 Disconnecter 0-1 (2 - pole)
- 2.8211 Disconnecter 0-1 (3 - pole)
- 2.8210 Disconnecter 0-1 (4 - pole)
- 3.8220 Disconnecter 0-1 (5 - pole)
- 3.8210 Disconnecter 0-1 (6 - pole)
- 4.8240 Disconnecter 0-1 (7 - pole)
- 4.824 Disconnecter 0-1 (8 - pole)
- 5.8220 Disconnecter 0-1 (9 - pole)
- 5.822 Disconnecter 0-1 (10 - pole)
- 6.8210 Disconnecter 0-1 (11 - pole)
- 6.821 Disconnecter 0-1 (12 - pole)
- 7.8220 Disconnecter 0-1 (13 - pole)
- 7.822 Disconnecter 0-1 (14 - pole)
- 8.8270 Disconnecter 0-1 (15 - pole)
- 8.827 Disconnecter 0-1 (16 - pole)
- 9.8210 Disconnecter 0-1 (17 - pole)
- 9.821 Disconnecter 0-1 (18 - pole)
- 10.8210 Disconnecter 0-1 (19 - pole)
- 10.821 Disconnecter 0-1 (20 - pole)
- 3.8368 Reversing switch L-0-P
- 3.83139 2-speed switch
- 2 separate windings
- 4.8390 2-speed Dahlander switch
- 7.8538 2-speed reversing Dahlander switch
- 4.831 3-phase starting switch 0-Y-Δ
- 5.8538 3-phase starting reversing switch
- 6.4470 3-speed Dahlander switch
- single winding for low speed
- 6.4480 3-speed Dahlander switch
- single winding for medium speed
- 6.4490 3-speed Dahlander switch
- single winding for high speed
- 4.883 Voltmeter selector switch
- 2.4414 Rotary disconnecter 0-1
- 2.8445 Control switch 0-1-2-3
- 1.834 Disconnecter 1-0-2 (1 - pole)
- 2.8338 Disconnecter 1-0-2 (2 - pole)
- 3.8380 Disconnecter 1-0-2 (3 - pole)
- 4.8396 Disconnecter 1-0-2 (4 - pole)
- 5.8380 Disconnecter 1-0-2 (5 - pole)
- 6.8380 Disconnecter 1-0-2 (6 - pole)
- 7.8380 Disconnecter 1-0-2 (7 - pole)
- 8.8380 Disconnecter 1-0-2 (8 - pole)
- 9.8380 Disconnecter 1-0-2 (9 - pole)
- 10.8380 Disconnecter 1-0-2 (10 - pole)

Current

40 40 A




Components

Fronts of cam switches

Front I SK25-1406 for assemblies P...

Front III SK25-1409 for assemblies P...(lockable)

Dimensions

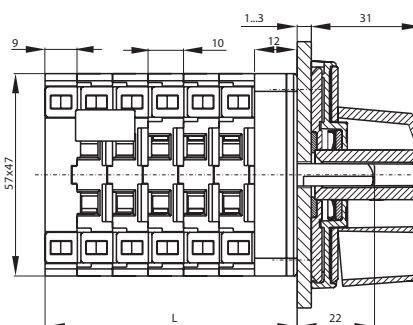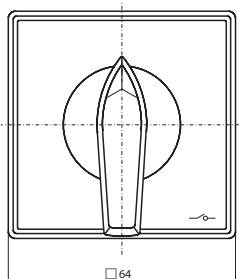

Number of segments	L [mm]
1	31
2	41
3	51
4	61
5	71
6	81
7	91
8	101
9	111
10	121

Number of segments in the switch

1 ... 10

Technical data

Rated insulation voltage U_e	690 V
Rated withstand impulse voltage U_{imp}	6 kV
Rated continuous current $I_u=I_{th}$	50 A
Rated operational current I_e for AC-21A, AC-22A	40 A (230/400/500/690 V)
Rated operational power P_e for AC-23A	9 kW (230 V) 15 kW (400 V) 18.5 kW (500 V) 26 kW (690 V)
Rated operational power P_e for AC-3	7.5 kW (230 V) 12 kW (400 V) 15 kW (500 V) 21 kW (690 V)
Rated operational current I_e for DC-21A	40 A (24 V) 20 A (110 V) 15 A (220 V)
Short-time short-circuit withstand current $I_{cw}(1s)$	0.5 kA
Rated short-circuit making current I_{cm}	0.7 kA
Rated conventional short-circuit current	10 kA
Rated current fuse link gG	50 A
Wire gauge	4...10 mm ²
Tightening torque, terminals	1.2 Nm
Panel mounting	□48
Mechanical endurance	3.0 mln (transposition cycles)
Ambient temperature	-40 ... +70°C (work) -40 ... +70°C (storage)
Protection level: PN-EN 60529 to the panel	IP65
Protection level of OB enclosure	IP65
Vibration test (acc. to IEC 60068-2-6)	2...13, 2...100 Hz (frequency) ± 1 mm (acceleration amplitude) ±0.7 g (acceleration amplitude)
Shock test (acc. to IEC 60068-2-27)	15 g (peak acceleration) 11 ms (impulse duration)
Damp heat cyclic test (acc. to IEC 60068-2-30)	55°C (ambient temperature) 95% (relative humidity)
Salt mist cyclic test (acc. to IEC 60068-2-52)	severity 1