

## Switch socket ZI with disconnector 0-I (SCHUKO)



IP44

### Ordering code

ZI  -S

Assembly number of the switch socket

03\R111, 03\R211, 03\R581, 04\R111  
04\R211, 04\R511, 05\R341, 05\R342  
05\R441, 05\R442

In assemblies: ZI05R\341-S, ZI05R\342-S, ZI05R\441-S, ZI05R\442-S the side socket is protected with a fuse-link WTA 10A/250V 1500 A AC.

Assemblies ZI01 are fitted with a rubber gland, other assemblies: metric gland


### Technical data

Rated insulation voltage $U_i$	500 V
Rated continuous current $I_u$	max 32 A
Rated frequency	50-60 Hz
Rated switching voltage $U_e$	230/400 V
Rated withstand impulse voltage $U_{imp}$	6 kV
Wire gauge	2.5..4 mm <sup>2</sup>
Protection level	IP44
Protection class	II
Gland type	rubber M25x1,5


### Product description

There is a variety of configurations regarding the type and current rating of sockets. Switch sockets ZI with main socket 16A are fitted with a cam switch ŁK16R in function of a disconnector 0-I. Units with main socket 32A are fitted with a cam switch ŁK32R. Switch sockets ZI are compliant with the standard: PN-EN 60439-3, PN-EN 60439-1.


### Electrical diagram




### Dimensions

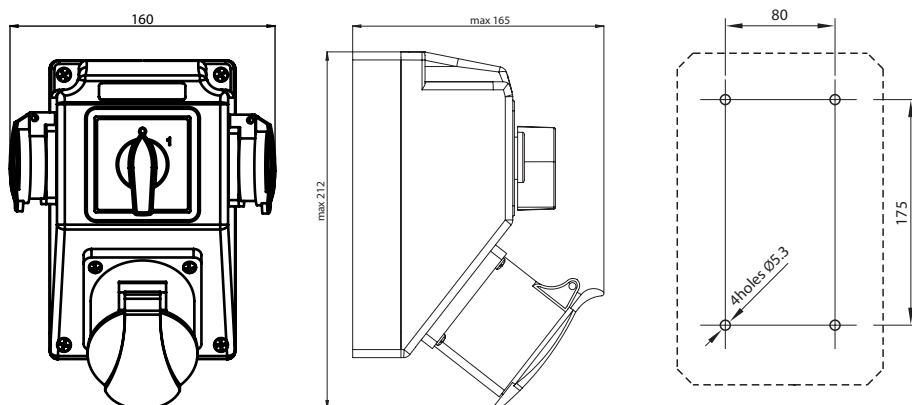

## Elements of the assemblies

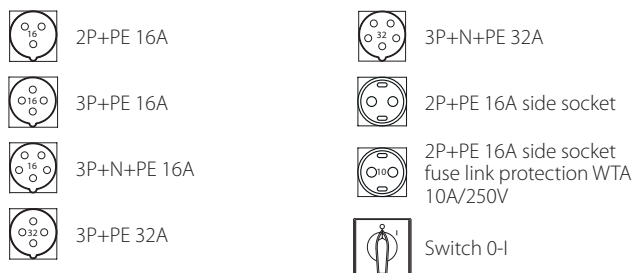

## Pin layout of the sockets

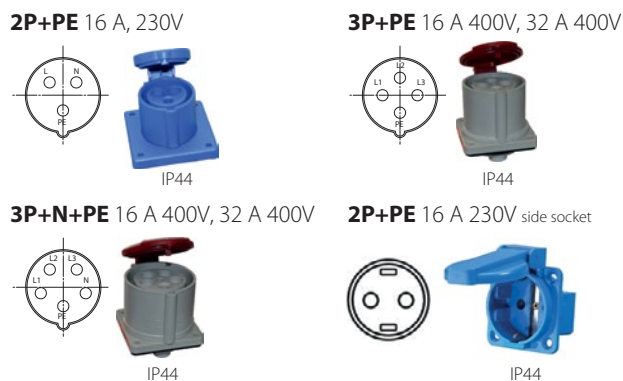

## Assemblies

