

## Switch receptacle ZO without protection



### Ordering code

ZO

Assembly number of the switch socket  
31\X341, 31\X441, 32\X111, 32\X211

### Technical data


Rated insulation voltage $U_i$	500 V
Rated continuous current $I_u$	max 32 A
Rated frequency	50-60 Hz
Rated switching voltage $U_e$	230/400 V
Rated withstand impulse voltage $U_{imp}$	6 kV
Wire gauge	2.5...6 mm <sup>2</sup>
Protection level	IP44
Protection class	II
Weight	0.5...1.0 kg
Gland type	M25x1,5 (16 A) M32x1,5 (32 A)

### Product description


Type ZO3... without protection carries out the switching function (ON/OFF). The complete device has protection level IP 44. The device is powered via the plug and controlled with the switch. Switch receptacles ZO are compliant with the standard: PN-EN 60439-3, PN-EN 60439-1.

New devices are compliant with RoHS Directive 2002/95/EC which means that they do not contain the hazardous substances listed in the Directive.

### Electrical diagram



### Dimensions

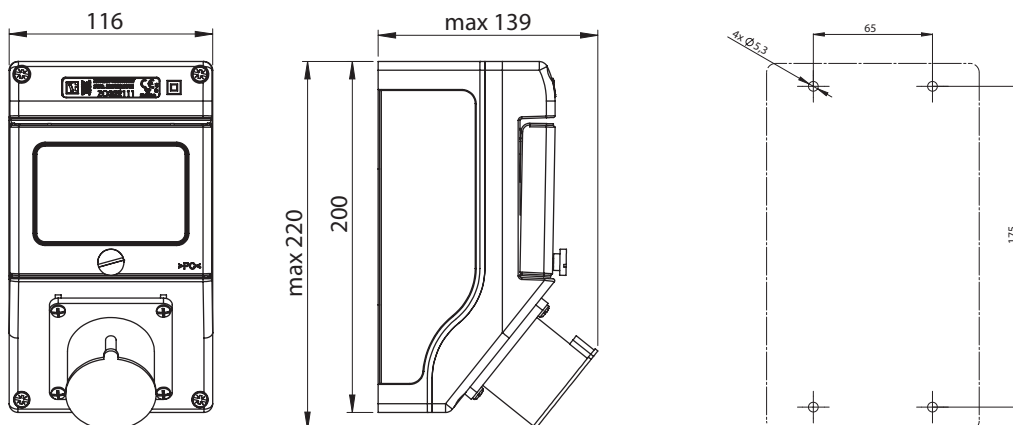

## Elements of the assemblies



3P+PE 16A



3P+PE 32A



3P+N+PE 16A




3P+N+PE 32A

## Pin layout of the plug

### 3P+PE


16 A 400V, 32 A 400V



IP44


### 3P+N+PE

16 A 230/400V, 32 A 230/400V




IP44


## Assemblies




ZO31\X341



ZO31\X441



ZO32\X111



ZO32\X211