


Cam switch, panel-mounted in $\varnothing 22$ opening, key-operated SK10G SA22



Silver label for the panel

Ordering code


SK 10 G- \ **SA22**

Mounting method
SA22 actuator D22 (IP54), key withdrawn in 0° position

Assembly number
1.825 Disconnecter 0-1 (1 - pole)
1.828 Disconnecter 0-1 (2 - pole)
2.8211 Disconnecter 0-1 (3 - pole)
2.8210 Disconnecter 0-1 (4 - pole)
3.8220 Disconnecter 0-1 (5 - pole)
3.8210 Disconnecter 0-1 (6 - pole)
3.8368 Reversing switch L-0-P
3.83139 2-speed switch
 2 separate windings
2.4414 Rotary disconnecter 0-1
2.8445 Control switch 0-1-2-3
1.834 Disconnecter 1-0-2 (1 - pole)
2.8338 Disconnecter 1-0-2 (2 - pole)
3.8380 Disconnecter 1-0-2 (3 - pole)

Current
10 10 A

Dimensions

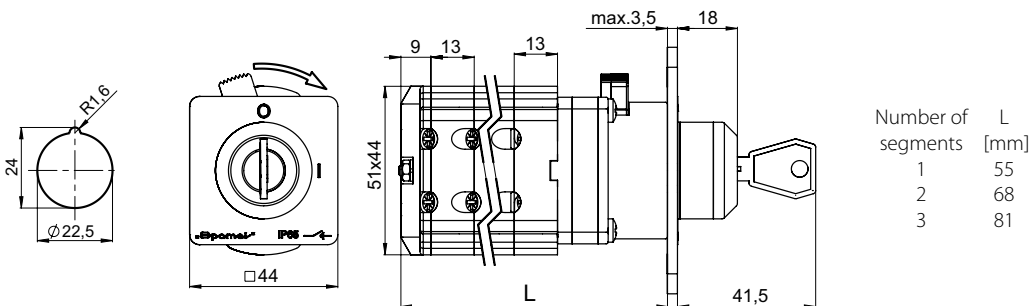

Number of segments in the switch

1 ... 3

Technical data

Rated insulation voltage U_e	690 V
Rated withstand impulse voltage U_{imp}	4 kV
Rated continuous current $I_u=I_{th}$	16 A
Rated operational current I_e for AC-21A, AC-22A	10 A (230/400/500/690 V)
Rated operational power P_e for AC-23A	2 kW (230 V) 4 kW (400 V) 5 kW (500 V) 6 kW (690 V)
Rated operational power P_e for AC-3	1.5 kW (230 V) 3 kW (400 V) 3.5 kW (500 V) 5 kW (690 V)
Rated operational current I_e for DC-21A	10 A (24 V) 6 A (110 V) 5 A (220 V)
Short-time short-circuit withstand current $I_{cw}(1s)$	0.5 kA
Rated short-circuit making current I_{cm}	0.7 kA
Rated conventional short-circuit current	10 kA
Rated current fuse link gG	10 A
Wire gauge	1,0...2,5 mm ² (solid, stranded)
Tightening torque, terminals	max 0,8 Nm
Panel mounting	$\varnothing 22$
Mechanical endurance	3.0 mln (transposition cycles)